

7SN10-7350/X2500-O/O Notch Filter

◆ Features:

- Suspended Technology
- SMA Connectors
- Plated Thru Hole Board



◆ Specifications:

Insertion Loss:

- @ 4.8 to 6.1 GHz
- @ 8.6 to 9.9 GHz

<1.5 dB
<1.5 dB

Environmental Specs:

Shock

20 G's, 1/2 Sine,
11ms

VSWR:

2.5:1 in Passband

Vibration

10 G's, 10 Hz-
2000 Hz

Stopband:

- @6.75 to 8.0 GHz

>50 dB

Temperature

-55 to 85° C

Relative Humidity


0-95%

Dimensions:


3.30" x 1.25" x
.50" (with SMA
male or female
connectors)

◆ Applications:

- Mobile

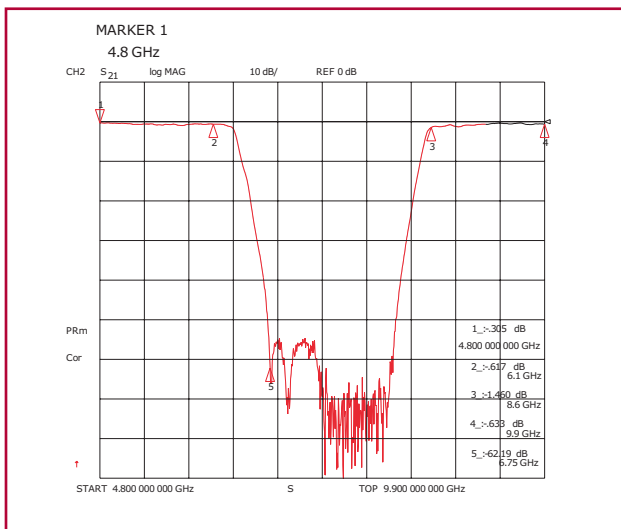

Amplitude

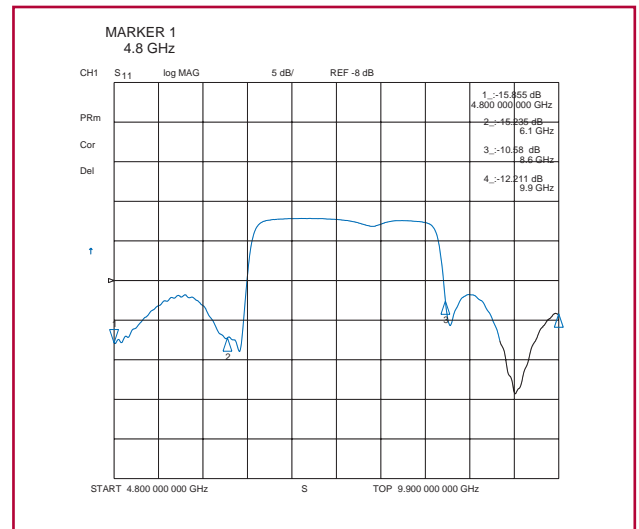

VRSW

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com



A DOVER COMPANY

Order On-Line @ www.klmicrowave.com