


# 5N45-4265/H1600-0/0 Moderate Band Reject Filter w/ Extended Upper Passband

## ◆ Features:

- High Performance
- Small Size
- Broad Operating Passband
- Broad Rejection Band

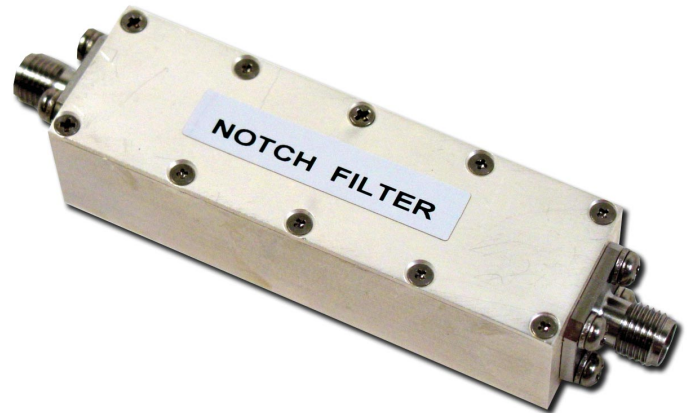


## ◆ Specifications:


Loss:	≤2.0 dB 50 - 3200 MHz
	≤2.0 dB 5300 - 12000 MHz
VSWR:	≤ 2.0:1 @ 50 - 3200 MHz
	≤ 2.0:1 @ 5300 - 12000 MHz
Rejection:	≥ 50 dB 3950 to 4580

## ◆ Applications:

- Protects Receivers from Newly Deployed High-Power Transmitters

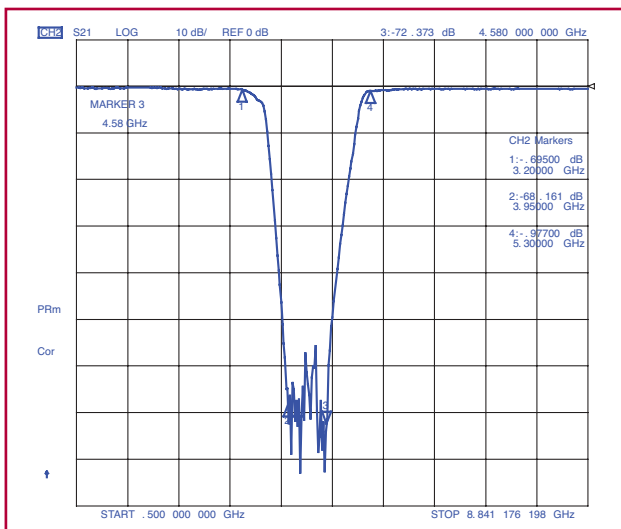

**Bandedge Loss and Rejection**

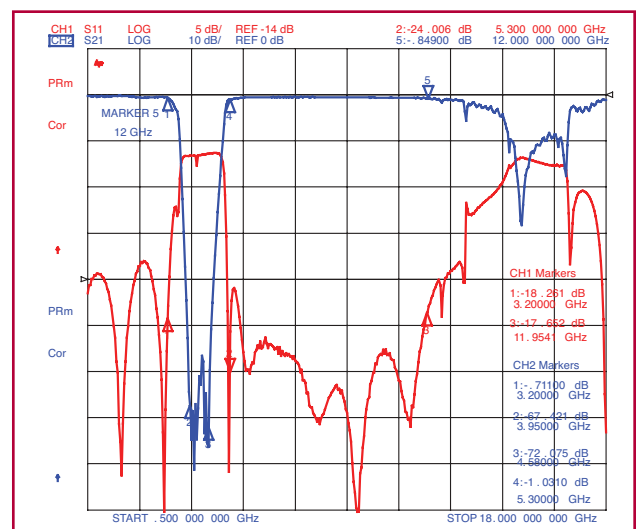

**Passband Performance**



Filtering Solutions for Your Global Market

**USA**  
 Phone: 410-749-2424  
 FAX: 443-260-2268  
 Email: sales@klmicrowave.com

**EUROPE**  
 Phone: +44-(0)-1904-567355  
 FAX: +44-(0)-1904-675521  
 Email: sales@kleurope.com

[www.klfilterwizard.com](http://www.klfilterwizard.com) & [www.klmicrowave.com](http://www.klmicrowave.com)