

4DRN40-422.75/X3-O/O High Power Ceramic Band Reject Filter

◆ Features:

- Power Handling Capabilities: 100 Watts CW
- Ultimate return is 1.9 times Center Frequency
- Lower Insertion loss




◆ Specifications:


Power Handling:	100 Watts CW	Dimensions:	2.25" L x 1.66" W x 0.60" H
Stepband Rejection:			-smaller than equivalent cavity (4.750" L x 1.13" W x 2.375" H)
421.25 - 424.25 MHz:	25 dB		(both sizes exclude connectors)
Passband Insertion Loss:			
20 - 414 MHz:	0.6 dB		
431.5 - 800 MHz:	0.6 dB		
415 - 419.25 MHz:	2.5 dB		
426.25 - 430.5MHz:	2.5 dB		

◆ Applications:

- Various Military Applications

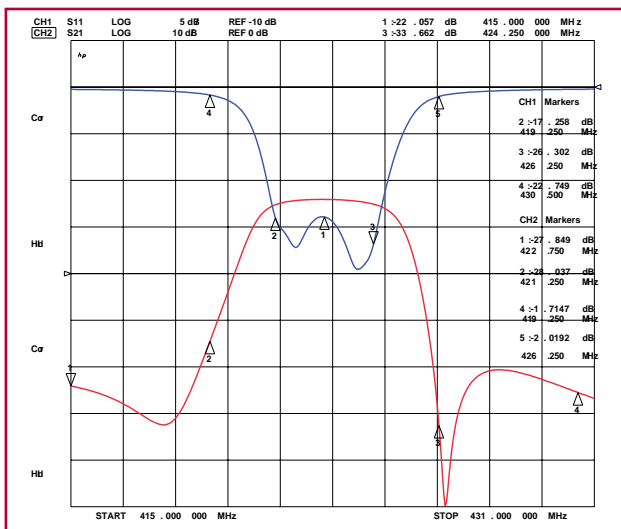

Passband Performance

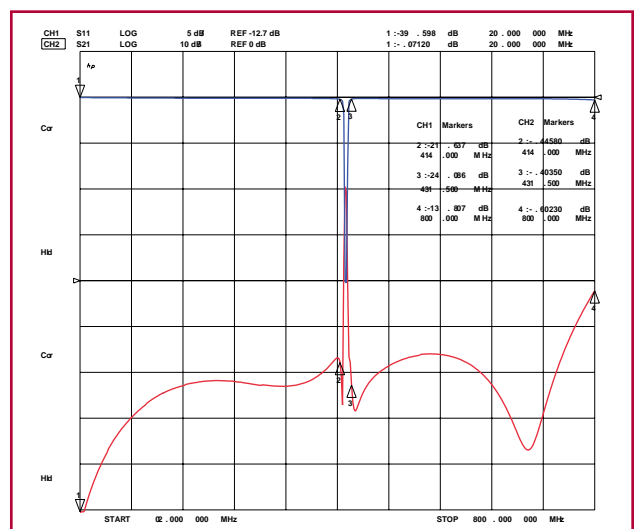

Out-of-Band Performance



Filtering Solutions for Your Global Market

USA
 Phone: 410-749-2424
 FAX: 443-260-2268
 Email: sales@klmicrowave.com

EUROPE
 Phone: +44-(0)-1904-567355
 FAX: +44-(0)-1904-675521
 Email: sales@kleurope.com

www.klfilterwizard.com & www.klmicrowave.com