

3TNF-3000/4000-N/N — Tunable Bandreject Filter

◆ Features:

- Designed for Lab Use and Test Applications
- 3 dB BW \approx 1% of the Tuned Center Frequency
- Manual and Digitally Controlled Versions Available
- Digital Control Options include GPIB, RS-232, RS-422 and BCD
- Optional Control Voltages Include 24 or 12 VDC and 110/220 VAC




◆ Specifications:


Tuning Range:	3000 to 4000 MHz
Passband VSWR:	1.5:1
Passband:	3000 to 4000 MHz
3 db Bandwidth:	\approx 1% of the Tuned Center Frequency
Notch Depth:	40 dB minimum
Passband Insertion Loss:	0.5 dB maximum
Size:	See attached Outline*
Connectors:	N Female**

*The outline does not depict the digital version.

**Other options are available. Please see above or contact K&L Microwave.

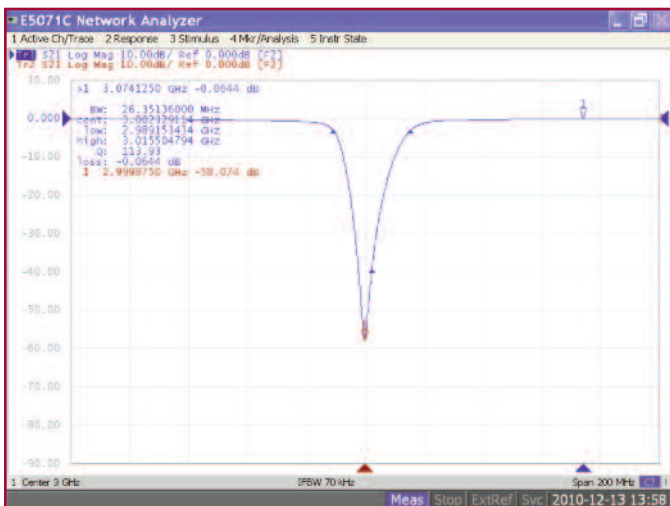

3 GHz

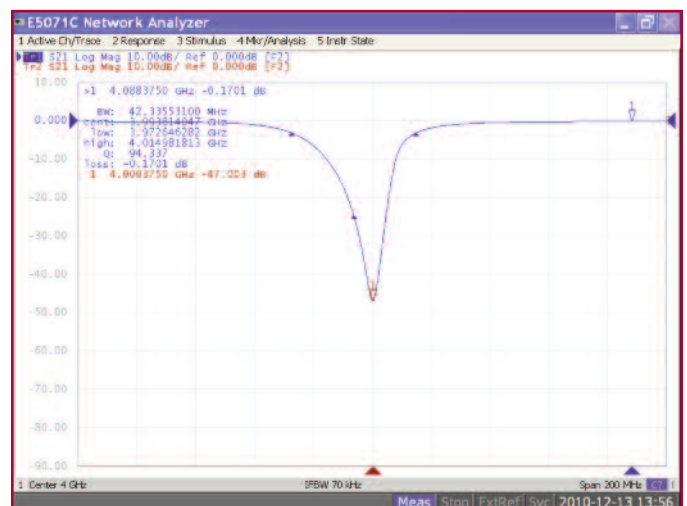

4 GHz

3TNF-3000/4000-N/N — Tunable Bandreject Filter

