


# 428 MHz Ultra-Miniature Filter

## ◆ Features:


- Extremely Small In Size
- All Pole Design

## ◆ Specifications:


Center Frequency (MHz)	428
3 dB % BW	20%
VSWR:	1.5:1
Insertion Loss:	<2 dB
Attenuation:	-40 dB
Impedance (Ohms):	50
Number of Sections:	3
Operating Temperature:	-40 to +70°C
Package Style:	Open Frame, Leadless Surface Mount

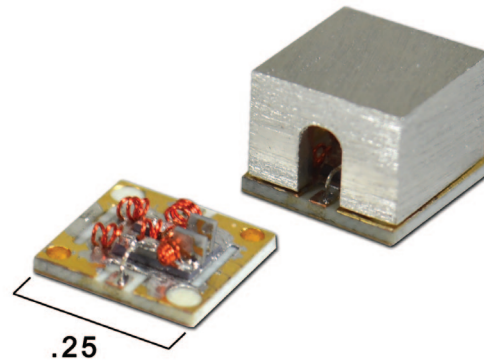

## ◆ Outline Drawing:

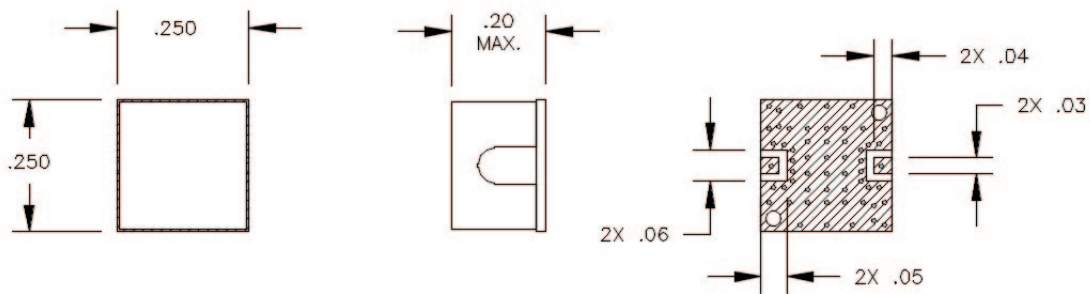

## ◆ Performance Data:

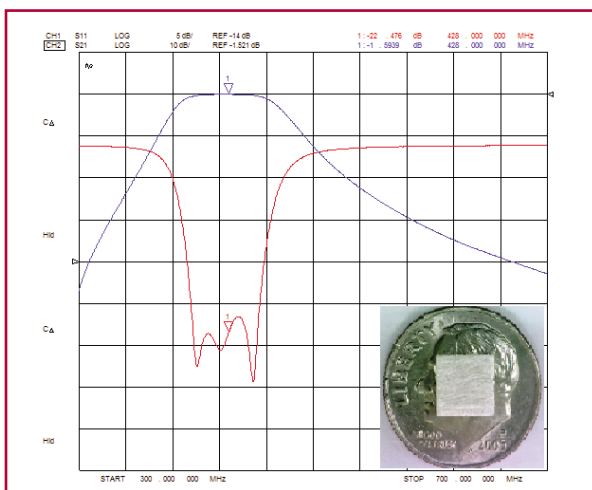

Typical Data